


KCCS-10. JIS 10K SWING CHECK VALVE

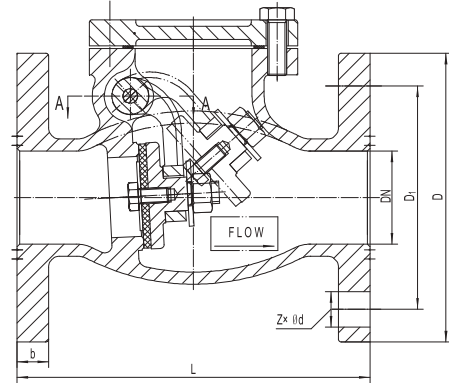

Specifications

Basic standard
● Flange end: JIS B 2239/KS B1511
Feature
● Nominal pressure : 10K ● Seal test(water): 1.6 MPa ● Shell test(water): 2.1MPa ● Suitable temperature: -10~85℃ ● Suitable medium: water

Main parts and materials

Part Name	Material
Body	Cast Iron
Seal ring	Brass/Stainless steel
Disc	Cast Iron
Hinge	Cast Iron
Pin	304

Dimensions

DN	L	D	D1	b	Z×Φd
40	190±1.5	140	105	17	4-Φ19
50	190±1.5	155	120	17	4-Φ19
65	190±1.5	175	140	18	4-Φ19
80	215±1.5	185	150	19	8-Φ19
100	245±1.5	210	175	20	8-Φ19
125	285±1.5	250	210	21	8-Φ23
150	295±2	280	240	21	8-Φ23
200	390±2	330	290	22	12-Φ23
250	500±2	400	355	25	12-Φ25
300	540±3	445	400	28	16-Φ25
350	570±3	490	445	34	16-Φ25
400	780±3	560	510	36	16-Φ27
500	820±3	675	620	40	20-Φ27